



BIFOLD DOOR



EN 14428:2015+A1:2018 (shower enclosures)
EN 12150-1:2013 (glass in building)
EN ISO7599 (anodizing of aluminium and its alloys)
8mm Toughened Safety Glass
Overall 40mm Profile Adjustment

2000mm Height
10mm Ultra Low Bottom Rail
Crafted Handle Design
ClearVue Glass Coating

Seamless Interior Cover Strips
Universal Left or Right Hand Opening
Ultra Clear Seals
20 Year Guarantee Against Manufacturing Defects*

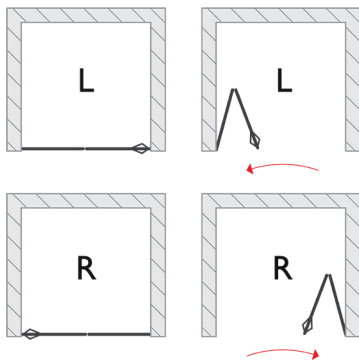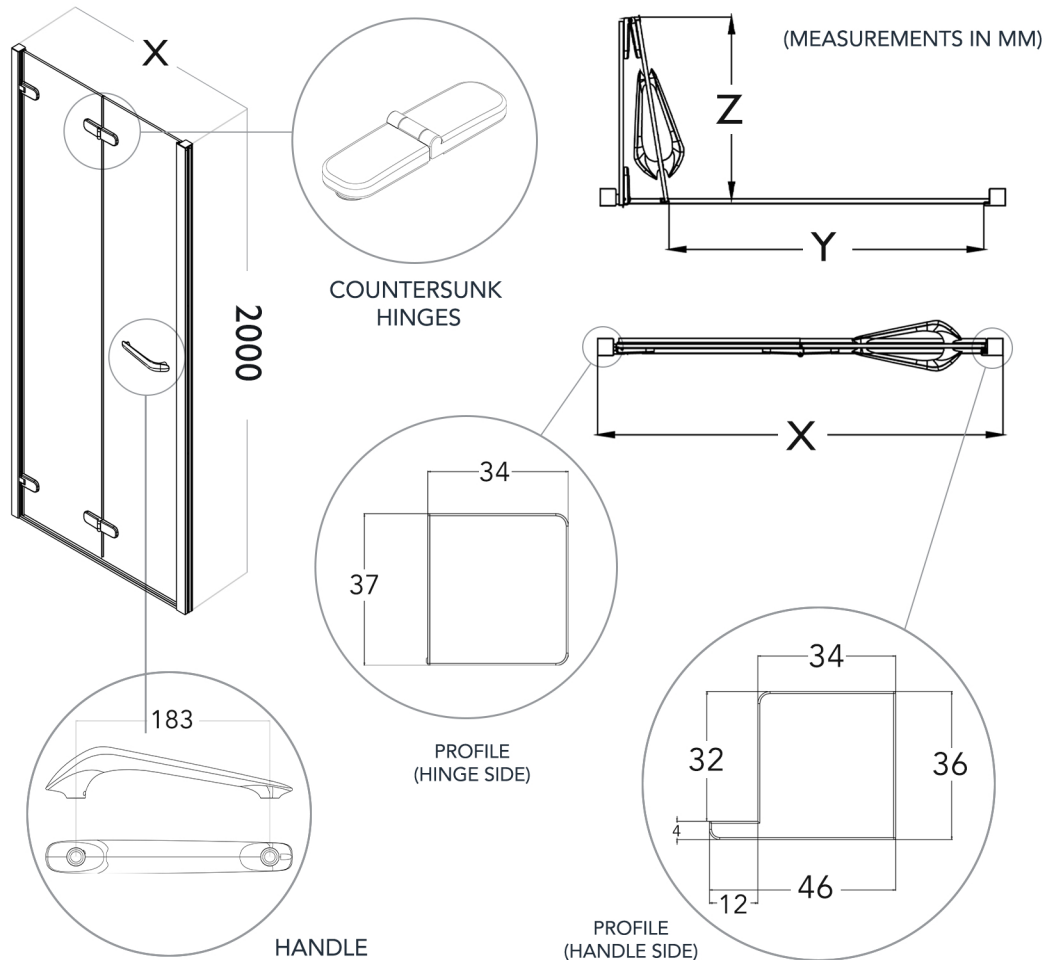

SPECIFICATIONS

PRODUCT SIZE	ADJUSTMENT X (min - max)	DOOR ACCESS Y	INTRUSION Z	PRODUCT WEIGHT	PRODUCT CODE	
					SILVER	BLACK
700mm	660 - 700mm	483mm	283mm	31.00kg	OROB70SC	N/A
760mm	720 - 760mm	545mm	313mm	33.00kg	OROB76SC	N/A
800mm	760 - 800mm	575mm	333mm	37.00kg	OROB80SC	OROB80BC
900mm	860 - 900mm	663mm	383mm	41.00kg	OROB90SC	OROB90BC
1000mm	960 - 1000mm	759mm	433mm	46.00kg	OROB100SC	OROB100BC

+353 42 966 8000 | flairshowers.com | sales@flairshowers.com

All data presented may be subjected to change without prior notice. Flair Showers does the best it can to provide accurate information. Flair Showers unfortunately cannot guarantee this, and accept no liability for any information / advice given.

* Excludes perishable items such as rollers, seals, hinges, etc.

